

TECHNICAL DATA SHEET

KOSOON®

Caratteristiche :




Modello: SLL001-A

- The luminaire is made from non-insulating aluminum.
- It can be modulated in different ways according to requirements.
- Ideal for exhibitions,galleries,bars,cafes,restaurants and other commercial premises.

Technical Parameters:


Model	SLL001-A
Potenza	7.5W
PF	0.9
CRI	≥80
CCT	4000K
CEfficiency Light	100lm/w
Lumen	750lm
Corner	110°
UGR	<26
Size	L250*W55*H75mm
Color	Nero
Input Voltage	220V-240V
IP Protection	IP40
Warranty	3 years
Certification	CE, RoHS

Product Image:

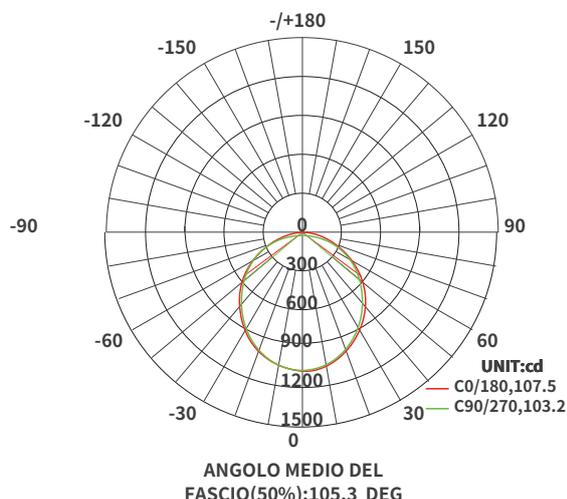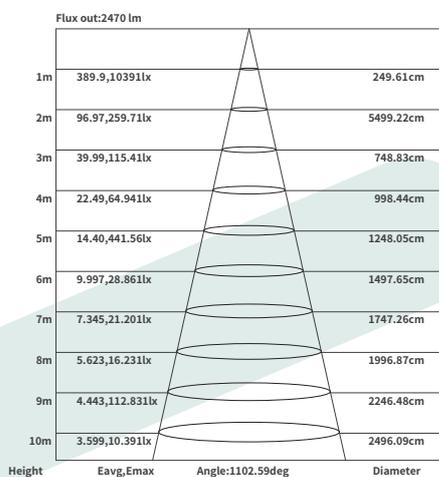


SLL003-A (110°)

Size diagram:

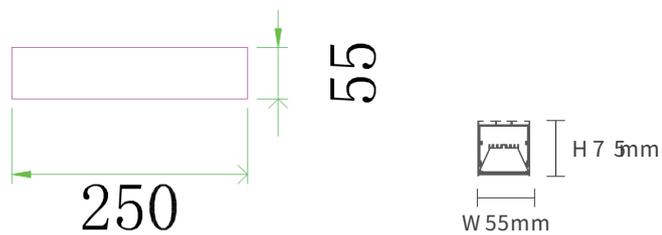

Installation method

Installation mode

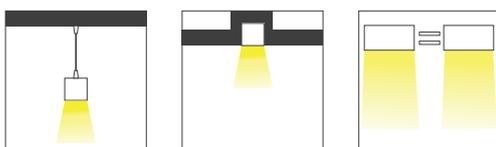

Steel suspension cable



TECHNICAL DATA SHEET

KOSOON®

Caratteristiche :




Modello: SLL001-A

- The luminaire is made from non-insulating aluminum.
- It can be modulated in different ways according to requirements.
- Ideal for exhibitions, galleries, bars, cafes, restaurants and other commercial premises.

Technical Parameters:


Model	SLL001-A
Power	15W
PF	0.9
CRI	≥80
CCT	4000K
Luminous efficiency	88lm/w
Lumen	1320lm
Corner	110°
UGR	<26
Size	L500*W55*H75mm
Color	Nero
Input Voltage	220V-240V
IP Protection	IP40
Warranty	3 years
Certificazione	CE, RoHS

Immagine Prodotto:

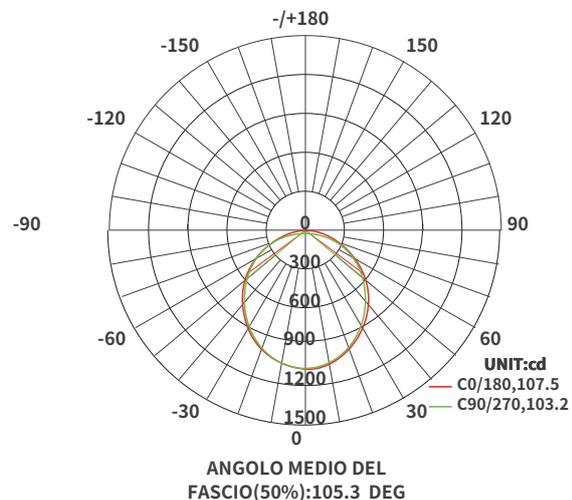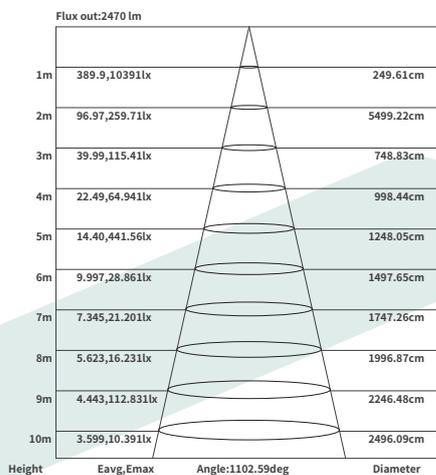


SLL003-A (110°)

Size diagram:

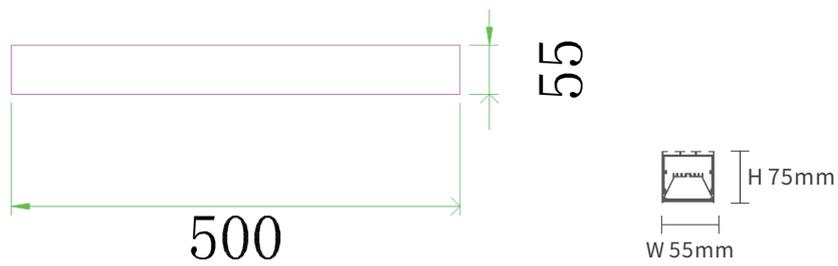

Installation method

Installation mode

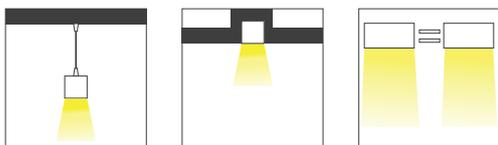

Steel suspension cable



TECHNICAL DATA SHEET.

KOSOON®

Caratteristiche :




Modello: SLL001-A

- The luminaire is made from non-insulating aluminum.
- It can be modulated in different ways according to requirements.
- Ideal for exhibitions,galleries,bars,cafes,restaurants and other commercial premises.

Technical Parameters:


Model	SLL001-A
Power	24W
PF	0.9
CRI	≥80
CCT	4000K
Luminous efficiency	87lm/w
Lumen	2080lm
Corner	110°
UGR	<26
Size	L500*W55*H75mm
Colore	Black
Input Voltage	220V-240V
Protezione IP	IP40
Warranty	3 Years
Certification	CE, RoHS

Immagine Prodotto:

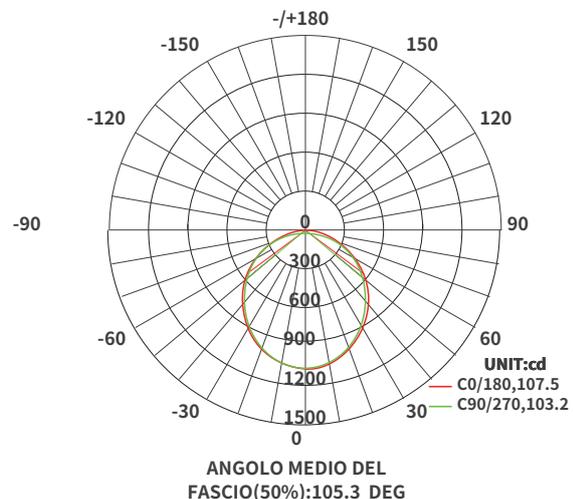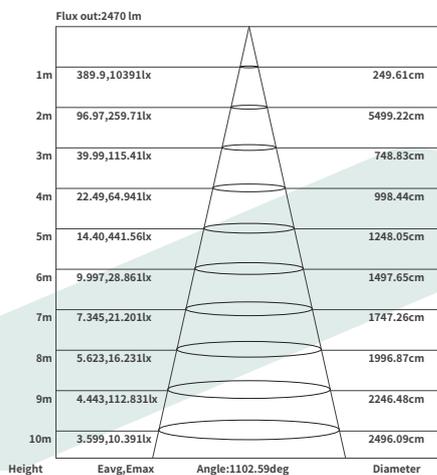


SLL003-A (110°)

Size diagram:

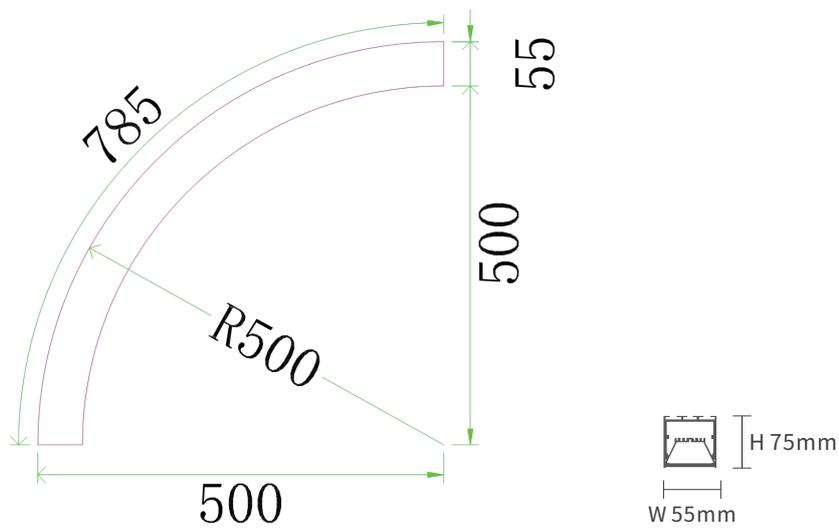

Installation method:

Installation mode

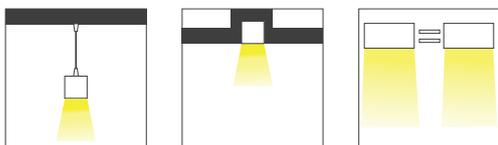

Steel suspension cable



TECHNICAL DATA SHEET

KOSOON®

Caratteristiche :




Modello: SLL001-A

- The luminaire is made from non-insulating aluminum.
- It can be modulated in different ways according to requirements.
- Ideal for exhibitions, galleries, bars, cafes, restaurants and other commercial premises.

Technical parameters:


Model	SLL001-A
Power	30W
PF	0.9
CRI	≥80
CCT	4000K
Luminous efficiency	92lm/w
Lumen	2760lm
Corner	110°
UGR	<26
Size	L1000*W55*H75mm
Color	Black
Input Voltage	220V-240V
IP Protection	IP40
Warranty	3 years
Certificazioni	CE, RoHS

Product Image:

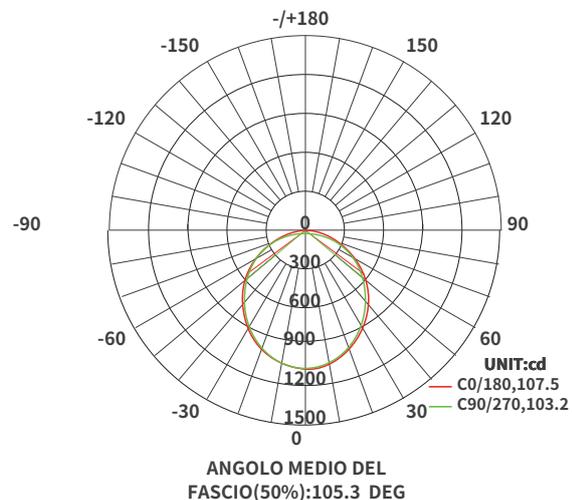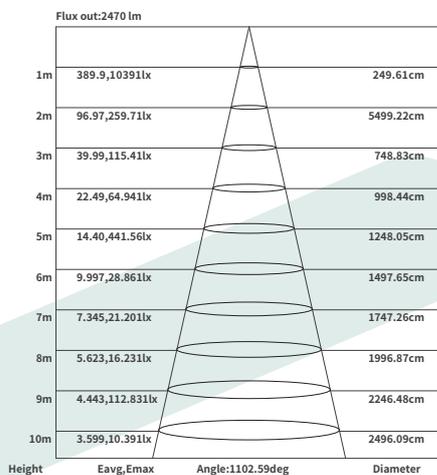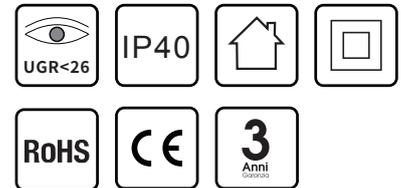


SLL003-A (110°)

Size diagram:

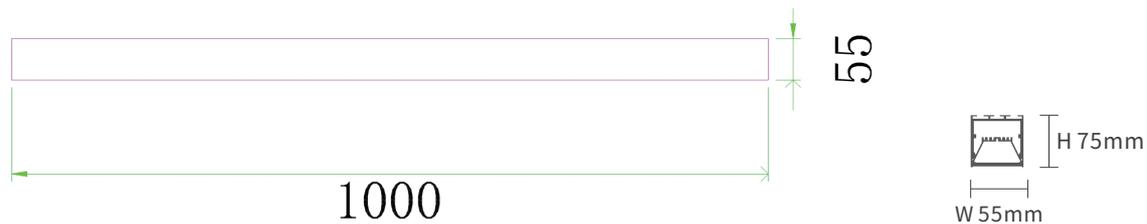

Installation method :

Installation mode

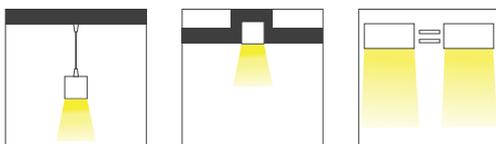

Steel suspension cable



TECHNICAL DATA SHEET.

Caratteristiche :




Modello: SLL001-A

- The luminaire is made from non-insulating aluminum.
- It can be modulated in different ways according to requirements.
- Ideal for exhibitions,galleries,bars,cafes,restaurants and other commercial premises.

Technical Parameters:


Model	SLL001-A
Power	48W
PF	0.9
CRI	≥80
CCT	4000K
Luminous efficiency	102lm/w
Lumen	4890lm
Corner	110°
UGR	<26
Size	L1000*W55*H75mm
Color	White
Input Voltage	220V-240V
IP Protection	IP40
Warranty	3 years
Certificazione	CE, RoHS

Product Image:

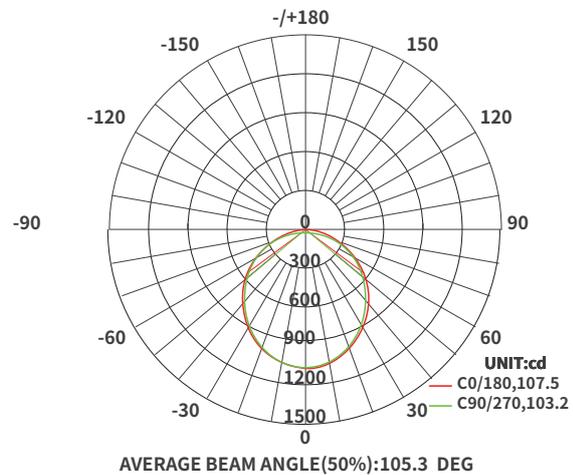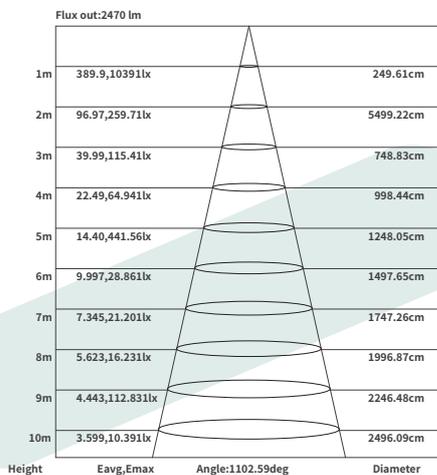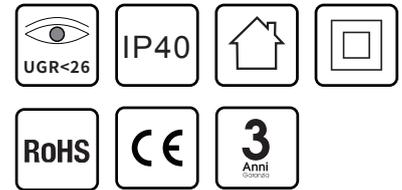


SLL003-A (110°)

Size diagram:

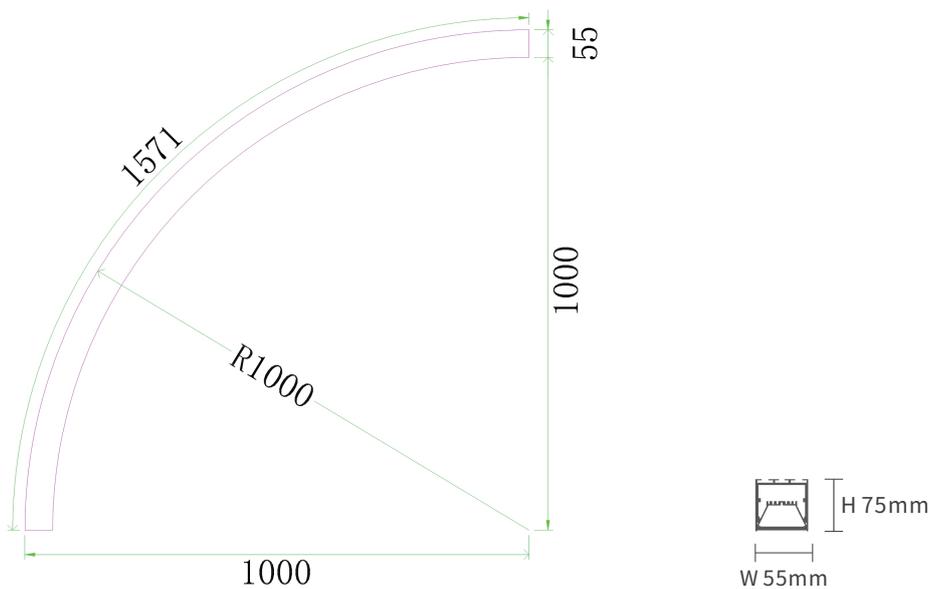

Installation method

Installation mode

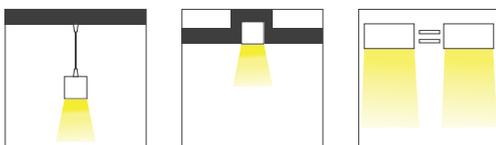

Steel suspension cable

