


Please take time to read this leaflet carefully and retain it for future reference.

#### Diagram:

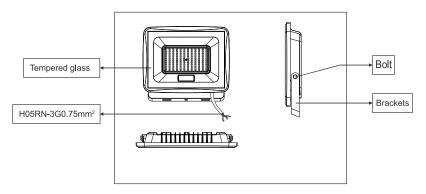

# Specification:

Voltage	AC 185-265V 60Hz					
Power factor	>0.9					
Wattage	10W	30W	50W	100W	150W	200W
Lumen	900lm	2700 <b>l</b> m	4500lm	9000lm	14500lm	18000lm
Lamp type	LED2835					
CRI	>80					
Material	Aluminum					
Beam angle	120°					
Products size	94.2x87.5x20.5	147.5x113.5x29	187.2x144.2x34.8	246.4x189.4x36	291.7x226.7x37.8	348x306x40.5
Color Temp	6500K					
Work Temp	-20°C— —+50°C					
Protection	IP65					
Housing color	Grey					

### Important Safety Information

- Do not wire this floodlight into the lighting circuit use a switched fused spur
- Before installation and servicing, disconnect the electrical supply at the mains.
- · Carefully observe all instructions or warnings that are labelled on, or supplied with, your product.
- This product is suitable for outdoor use. If in any doubt, consult a qualified electrician.

# **Fixing instructions**

Do not wire this floodlight into the lighting circuit - use a switched fused spur.


This fitting must be earthed. contact a qualified electrician to install a suitable earth facility. Ensure the electricity is turned off at the mains before installing or maintaining any electrical fitting. Please note: For new installations, check for any electrical cables or pipe work (gas/water) in the vicinity of the intended mounting point for this product, before proceeding with the installation.


## General Information


Do not mount ceiling/wall fittings onto damp surfaces such as newly painted or plastered areas as this may cause discolouration of the finish.

Tools which may be required:

- Drill
- Cross Head Screwdriver
- · Small Electrical Slotted Screwdriver
- Insulation Tape



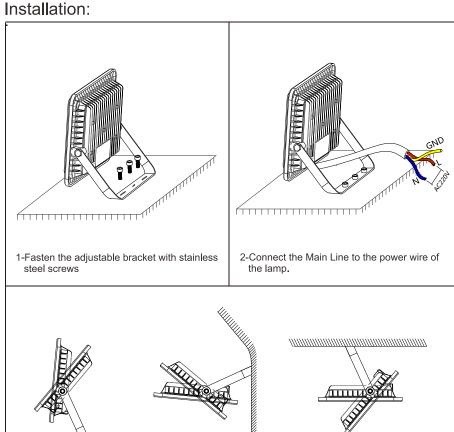





This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)